


MECHANICAL:

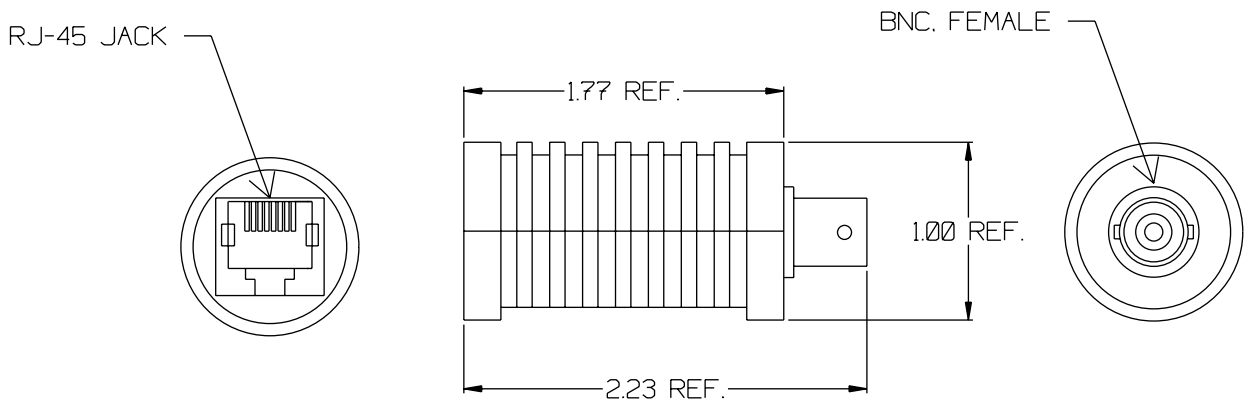

ELECTRICAL:

INSERTION LOSS: < 1.5 dB, 100kHz TO 10 MHz (PER PAIR)
 RJ-45 JACK PINS 4 AND 5 ACTIVE

DC RESISTANCE: < 1 OHM
 RJ-45 JACK PIN 5 TO BNC SHELL
 RJ-45 JACK PIN 4 TO BNC CENTER

HIPOT: 250 VAC FOR 1 SECOND
 RJ-45 JACK PIN 4 TO PIN 5

APPLICATION:

For use in security and surveillance systems using CAT5 or better grade cable up to 1000 feet in length. (Product testing in specific applications is recommended.)

For more information go to - <http://www.lynxbroadband.com>

BH® BH ELECTRONICS, INC.
 BURNSVILLE & MARSHALL, MN
 ©1998 BH Electronics

TITLE:
 Bobcat™ VIDEO BALUN

PART NO:	040-0094	DATE:	4/03
----------	----------	-------	------