


MECHANICAL:

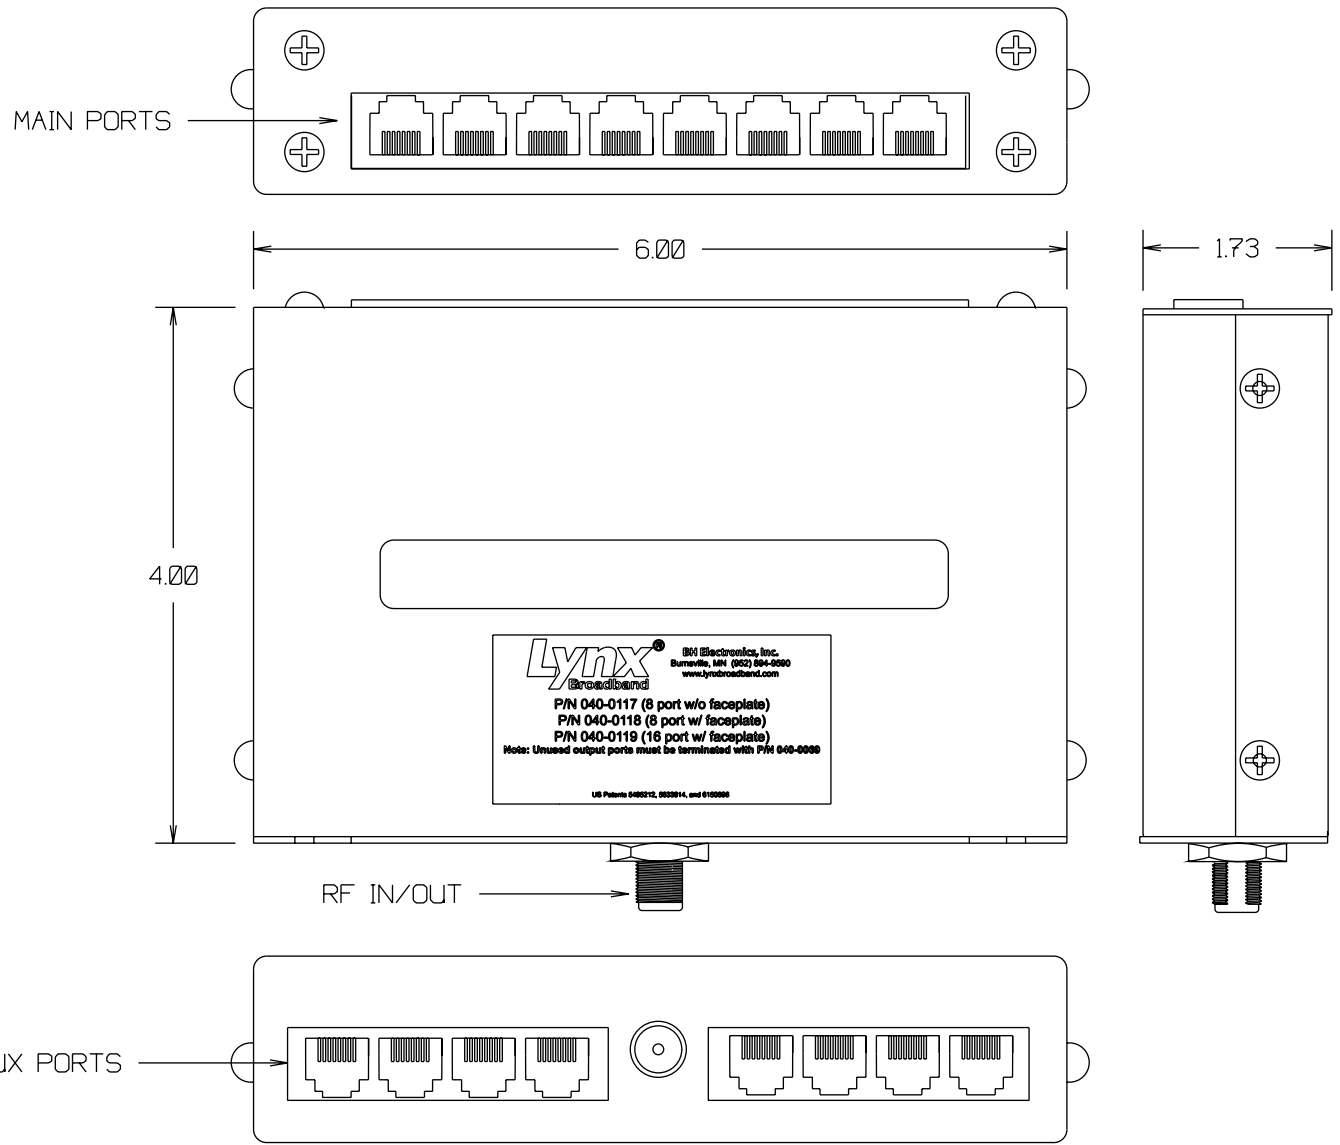

ELECTRICAL:

INSERTION LOSS:	< 13 dB, 5 MHz TO 40 MHz < 14 dB, 40 MHz TO 260 MHz < 17 dB, 260 MHz TO 550 MHz < 19 dB, 550 MHz TO 860 MHz
FLATNESS:	+/- 1.5 dB MAXIMUM, ALL PORTS
VIDEO PINOUT:	RJ-45 PIN 7 AND PIN 8

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: 1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND 2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRED OPERATION.

US PATENTS 5,495,212 AND 5,633,614 AND 6,150,896

APPLICATION:

For use in distributing CATV/MATV signals with data, phone, or remote control on pairs 1, 2, or 3 of CAT5 or higher grade cable. (Product testing in specific applications is recommended.)

For more information go to - <http://www.lynxbroadband.com/>

BH[®] BH ELECTRONICS, INC.
BURNSVILLE & MARSHALL, MN
©1998 BH Electronics

TITLE:
Lynx[®] 8 PORT
VIDEO AND DATA HUB

PART NO:	040-0117	DATE:	5/03
----------	----------	-------	------