


ORR1000

OPTICAL RACKMOUNT RECEIVER 1000

1 GHz Fiber Receiver

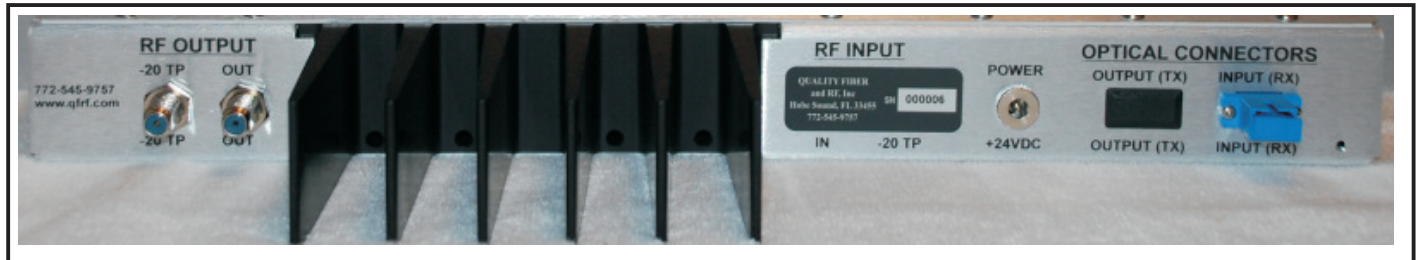

**** Features ****

- Integrated Optical Power Meter
- External Switching Wall Power Supply
- Wide Range Input -5 to +3 dBm
- Slope and Gain Controls
- +48dBmV Typical RF Output
- Return Path TX Options
- DOCSIS 3.0 Field Upgradable
- Very Low Noise and Distortion

ORDERING INFORMATION:

ORR1000 - 48 - SA - DFB

- 1 2 3 4
- 1 = Frequency Range:
1000 = 1 GHz GaAs Power Doubled
- 2 = Output Level:
26 = 26 dBmV
48 = 48 dBmV
- 3 = Connector:
SA = SC/APC
SU = SC/UPC
- 4 = Return Option:
DFB = 2mw DFB
FP = 1mw FP

ORR1000	Power Doubled GaAs
Bandwidth (MHz)	1 GHz
Freq. Response (dB)	± 0.5
Channel Loading	79 Analog + 450 MHz Digital
Gain Cont. Range	20dB
Slope Cont. Range	18dB
Optical Input Level	-5 to +3 dBm
Output Levels	48 dBmV typical
Distortions:	
Comp. Tr. Bt. (-dB)	82
Comp. 2nd Ord. (-dB)	77
Carrier to Noise (dB)	53
Return Loss (dB) worst case	15
DC Amperes @ 24 VDC	.67
Power Dissipation (AC Watts)	20