

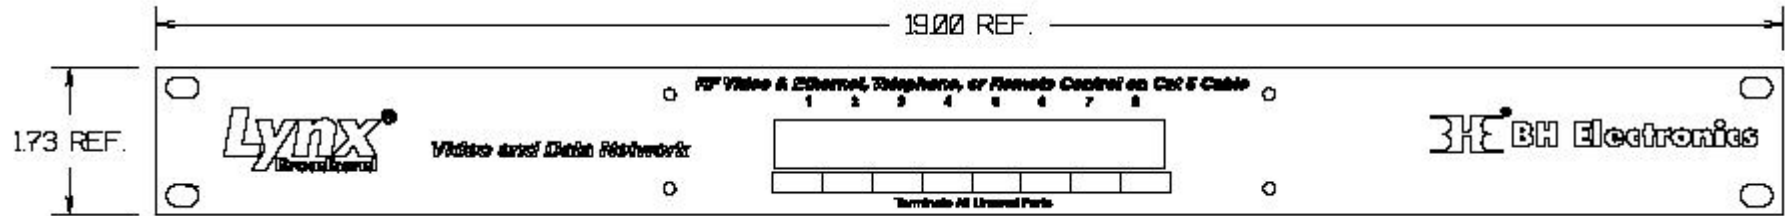
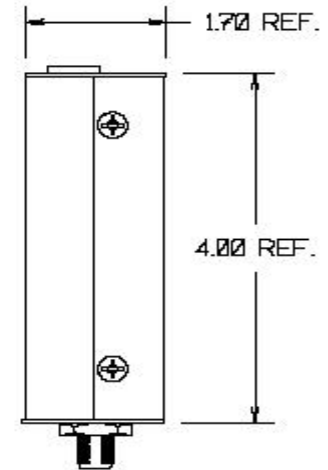


MECHANICAL:

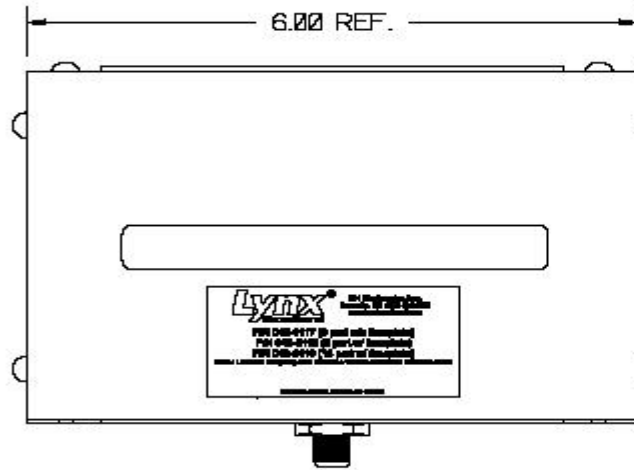

NOTE: ONE RACKMOUNT PLATE AND ONE DISTRIBUTION HUB

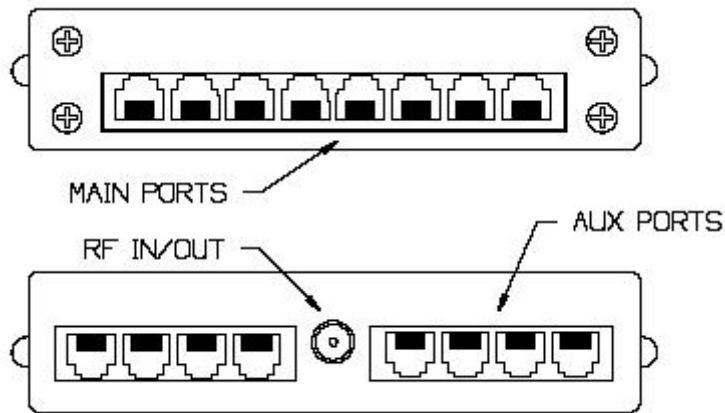

ELECTRICAL:

INSERTION LOSS:	< 13 dB. 5 MHz TO 40 MHz
	< 14 dB. 40 MHz TO 260 MHz
	< 17 dB. 260 MHz TO 550 MHz
	< 19 dB. 550 MHz TO 860 MHz

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: 1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE. AND 2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE OPERATION.

FLATNESS: +/- 15 dB MAXIMUM, ALL PORTS


US PATENTS 5,495,212 AND 5,633,614 AND 6,150,896

VIDEO PINOUT RJ-45 PIN 7 AND PIN 8

APPLICATION:

Rackmount RF video and data distribution hub for use in CATV/MATV systems with distances of up to 100 meters on CAT5 or better grade cable. (Product testing for specific applications is recommended)

For more information contact [Lynx Broadband](http://www.lynxbroadband.com)

 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN ©1998 BH Electronics	
TITLE: Lynx® 8 PORT RACKMOUNT VIDEO AND DATA HUB	
PART NUMBER: 040-0018	DATE: 5/03