


MECHANICAL:

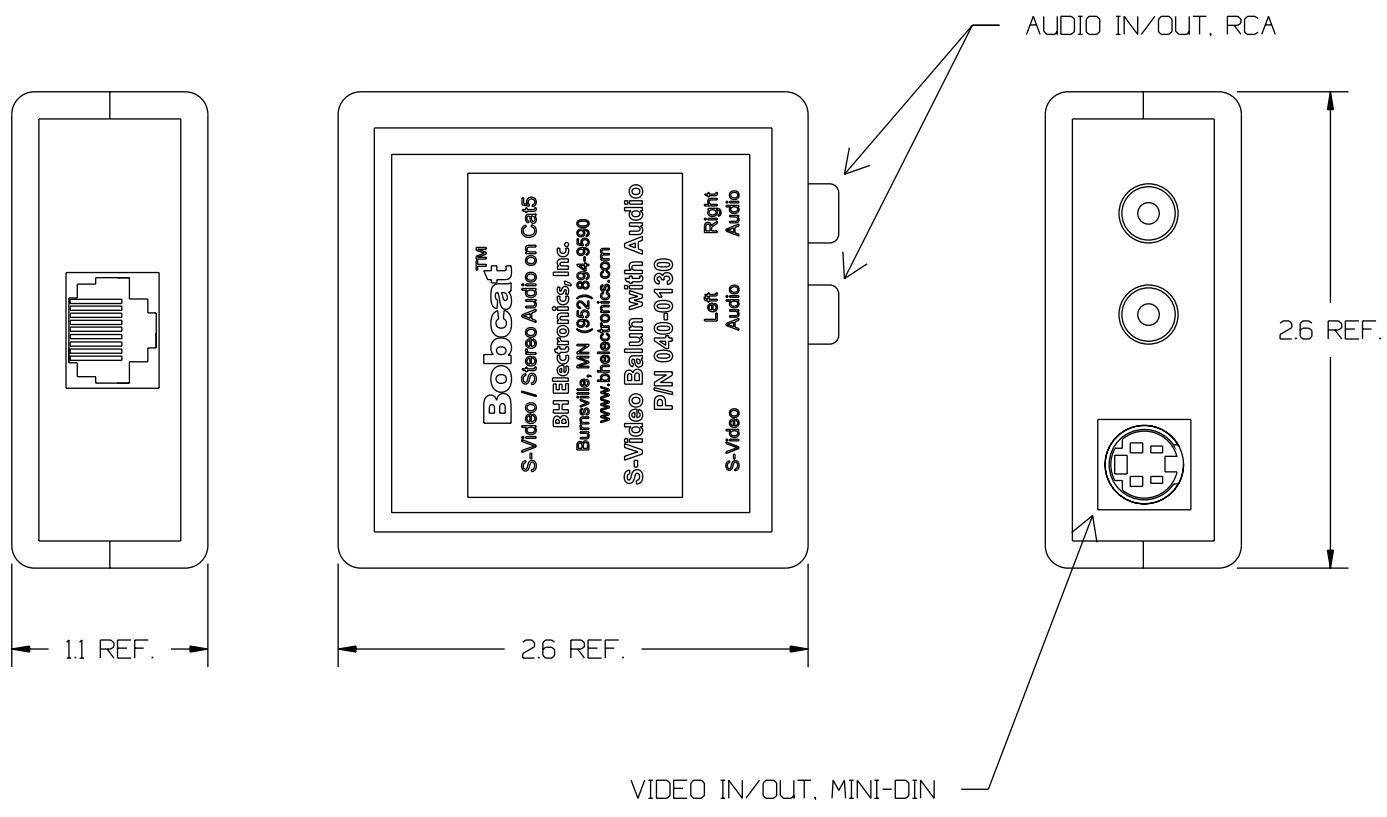

ELECTRICAL:

VIDEO INSERTION LOSS: CHROMINANCE - < 1dB, DC TO 6 MHz
LUMINANCE - < 1dB, DC TO 6 MHz

AUDIO INSERTION LOSS: < 3.2dB, 300 Hz TO 20 kHz

PIN CONFIGURATION: S-VIDEO CHROMINANCE - RJ-45 PINS 1 AND 2
S-VIDEO LUMINANCE - RJ-45 PINS 7 AND 8
RIGHT AUDIO (RED) - RJ-45 PINS 3 AND 6
LEFT AUDIO (WHITE) - RJ-45 PINS 4 AND 5

APPLICATION:

For more information go to - <http://www.lynxbroadband.com/>

For use in multimedia and entertainment systems using twisted pair wiring up to 100 meters in length to transmit S-Video and line-level stereo signals. (Product testing in specific applications is recommended.)

BH® BH ELECTRONICS, INC.
BURNSVILLE & MARSHALL, MN
©1998 BH Electronics

TITLE:
Bobcat™ S-VIDEO AND
STEREO AUDIO BALUN

PART NO:	040-0130	DATE:	5/03
----------	----------	-------	------