


MECHANICAL:

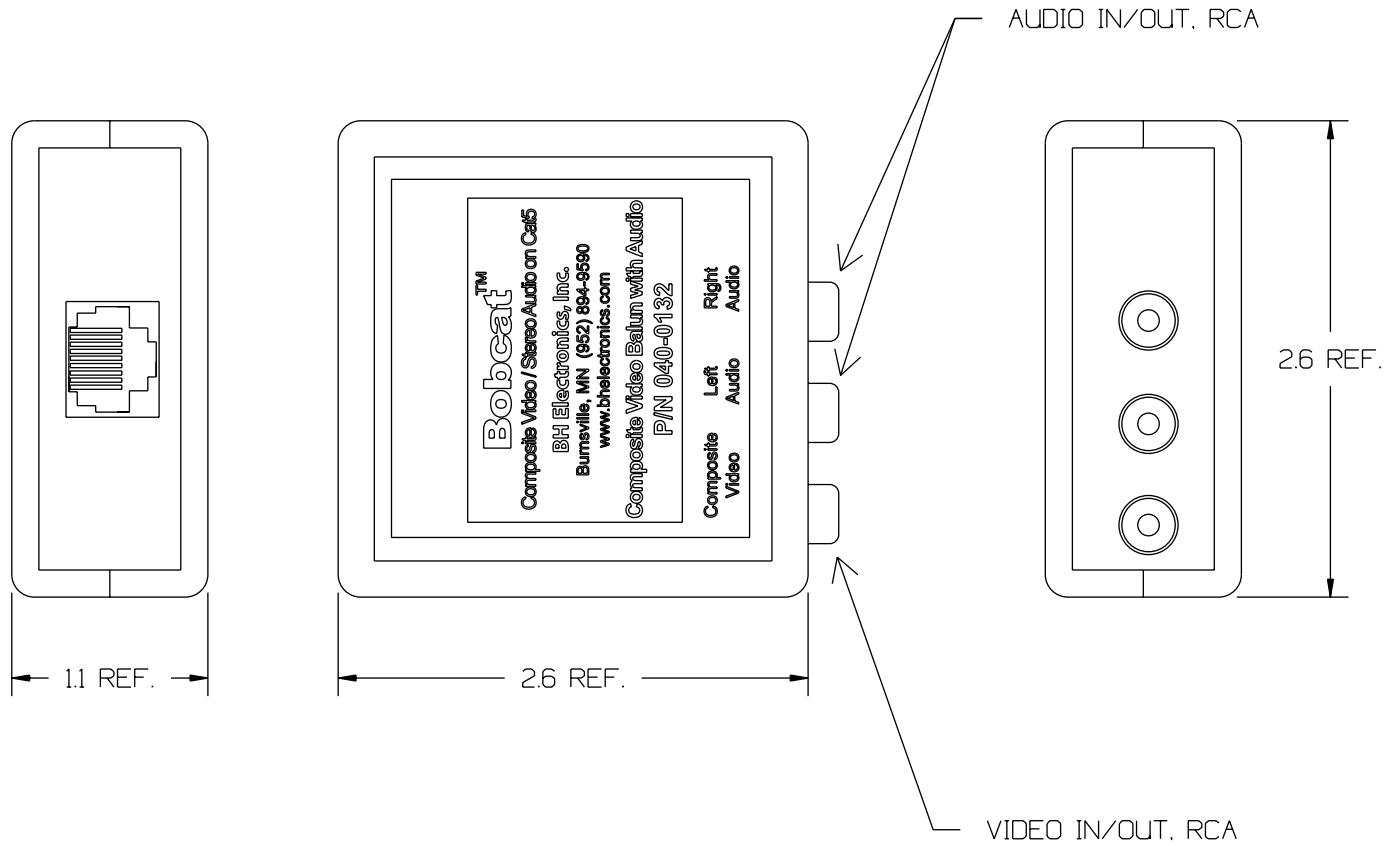

ELECTRICAL:

VIDEO INSERTION LOSS: < 1dB. DC TO 6 MHz

AUDIO INSERTION LOSS: < 3.2dB. 300 Hz TO 20 kHz

PIN CONFIGURATION: COMPOSITE VIDEO (YELLOW) - RJ-45 PINS 1 AND 2
 RIGHT AUDIO (RED) - RJ-45 PINS 3 AND 6
 LEFT AUDIO (WHITE) - RJ-45 PINS 4 AND 5

APPLICATION: For more information go to - <http://www.lynxbroadband.com/>

For use in multimedia and entertainment systems using twisted pair wiring up to 100 meters in length to transmit composite video and line-level stereo signals. (Product testing in specific applications is recommended.)

BH® BH ELECTRONICS, INC.
 BURNSVILLE & MARSHALL, MN
 ©1998 BH Electronics

TITLE:
 Bobcat™ COMPOSITE VIDEO
 AND STEREO AUDIO BALUN

PART NO:	040-0132	DATE:	5/03
----------	----------	-------	------