


MECHANICAL:

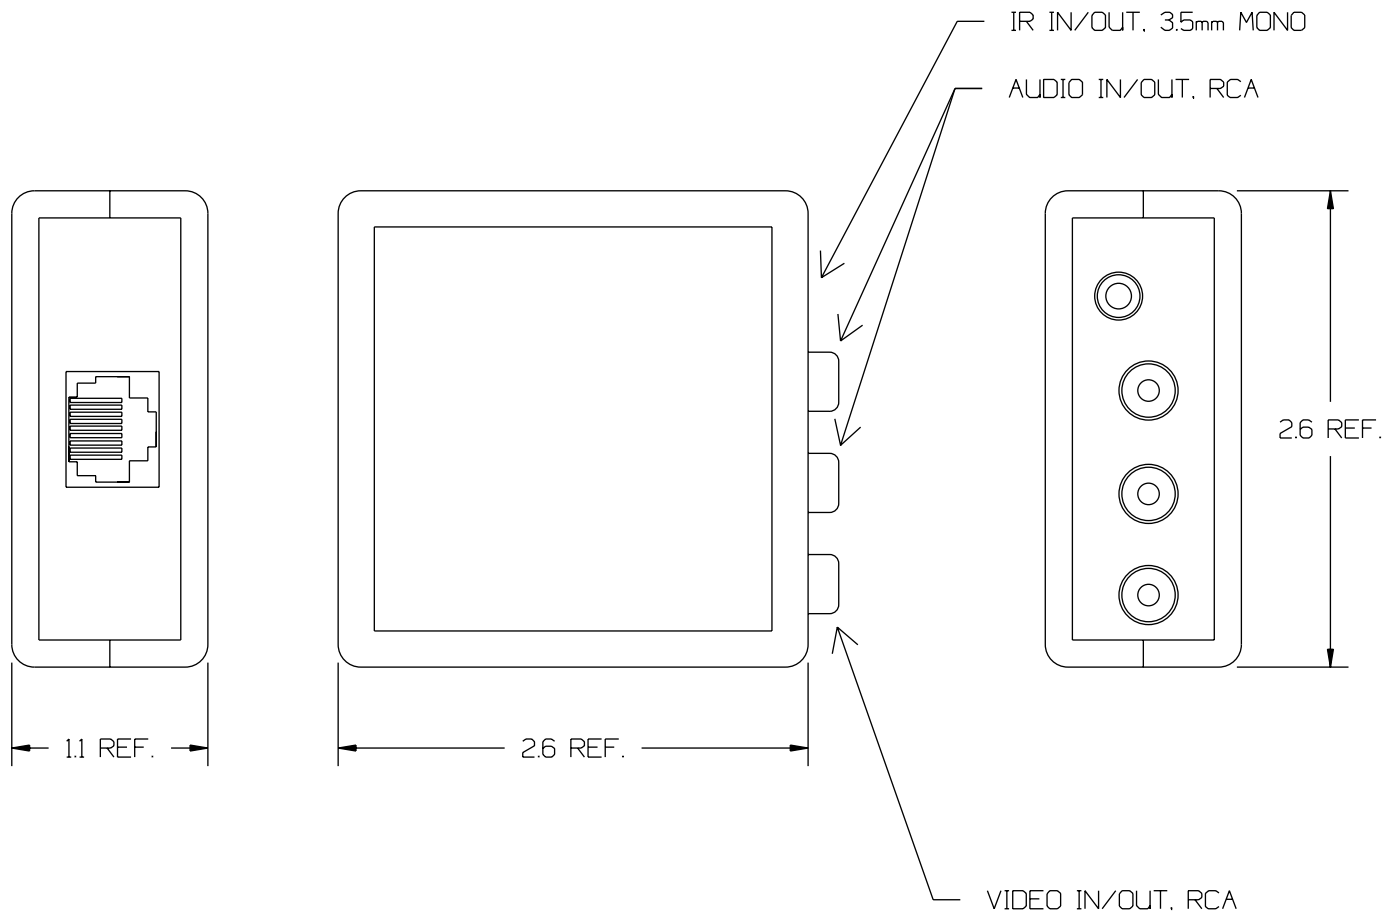

ELECTRICAL:

- VIDEO INSERTION LOSS: < 1dB. DC TO 6 MHz
- AUDIO INSERTION LOSS: < 3.2dB. 300 Hz TO 20 kHz
- PIN CONFIGURATION:
  - COMPOSITE VIDEO (YELLOW) - RJ-45 PINS 1 AND 2
  - RIGHT AUDIO (RED) - RJ-45 PINS 3 AND 6
  - LEFT AUDIO (WHITE) - RJ-45 PINS 4 AND 5
  - IR SIGNAL (3.5mm TIP, SLEEVE) - RJ-45 PINS 7 AND 8
- IR SIGNAL: 12Vdc. 100mAdc MAXIMUM

APPLICATION:

For use in multimedia and entertainment systems using twisted pair wiring up to 100 meters in length to transmit composite video, line-level stereo audio and IR signals. (Product testing in specific applications is recommended.)

**BH**® BH ELECTRONICS, INC.  
 BURNSVILLE & MARSHALL, MN  
 ©1998 BH Electronics

TITLE:  
 Bobcat™ COMPOSITE VIDEO  
 STEREO AUDIO + IR BALUN

PART NO:	040-0139	DATE:	4/04
----------	----------	-------	------