


MECHANICAL

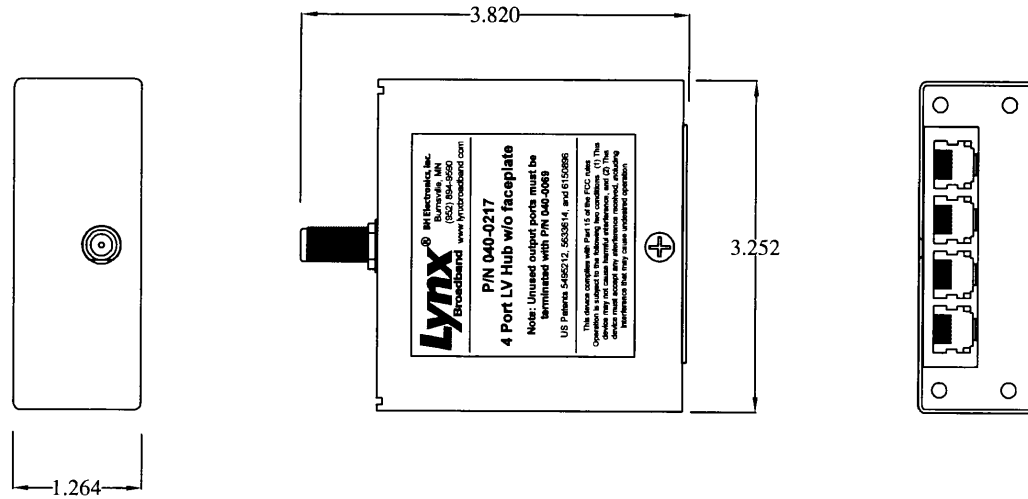

ELECTRICAL SPECIFICATIONS

INSERTION LOSS: <10dB @ 10 MHz - <11dB @ 50 MHz


<10dB @ 50 MHz - <15dB @ 860 MHz TERMINATE UNUSED PORTS WITH 100 OHM

DC RESISTANCE: 39.9 - 54.0 OHMS RJ-45 PIN 1 TO GROUND, PIN 2 TO GROUND, PIN 3 TO GROUND, PIN 4 TO GROUND, PIN 5 TO GROUND, PIN 6 TO GROUND

RETURN LOSS: >12dB, 5 MHz - 250 MHz

>12dB @ 250 MHz - >7dB @ 860 MHz ALL PORTS

PORT TO PORT RIPPLE: <±1.5dB 5-550 MHz TERMINATE UNUSED PORTS WITH 100 OHMS

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				CATALOG	
				<input type="checkbox"/> CUSTOM <input checked="" type="checkbox"/> NON-PROPRIETARY	
				DRAWN: K. LOFTUS	
				ENGR: B. GASS	TITLE:
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	4 PORT LYNX VIDEO HUB
A	7-23-08	CUSTOMER PRINT (Q12318)	b-6	PAGE 1 OF 1	PART NO. 040-0217
ISSUE	DATE	REVISION	BY		