
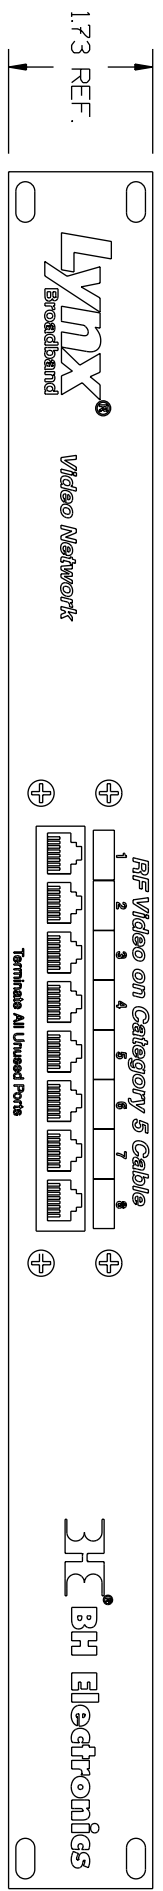


MECHANICAL:

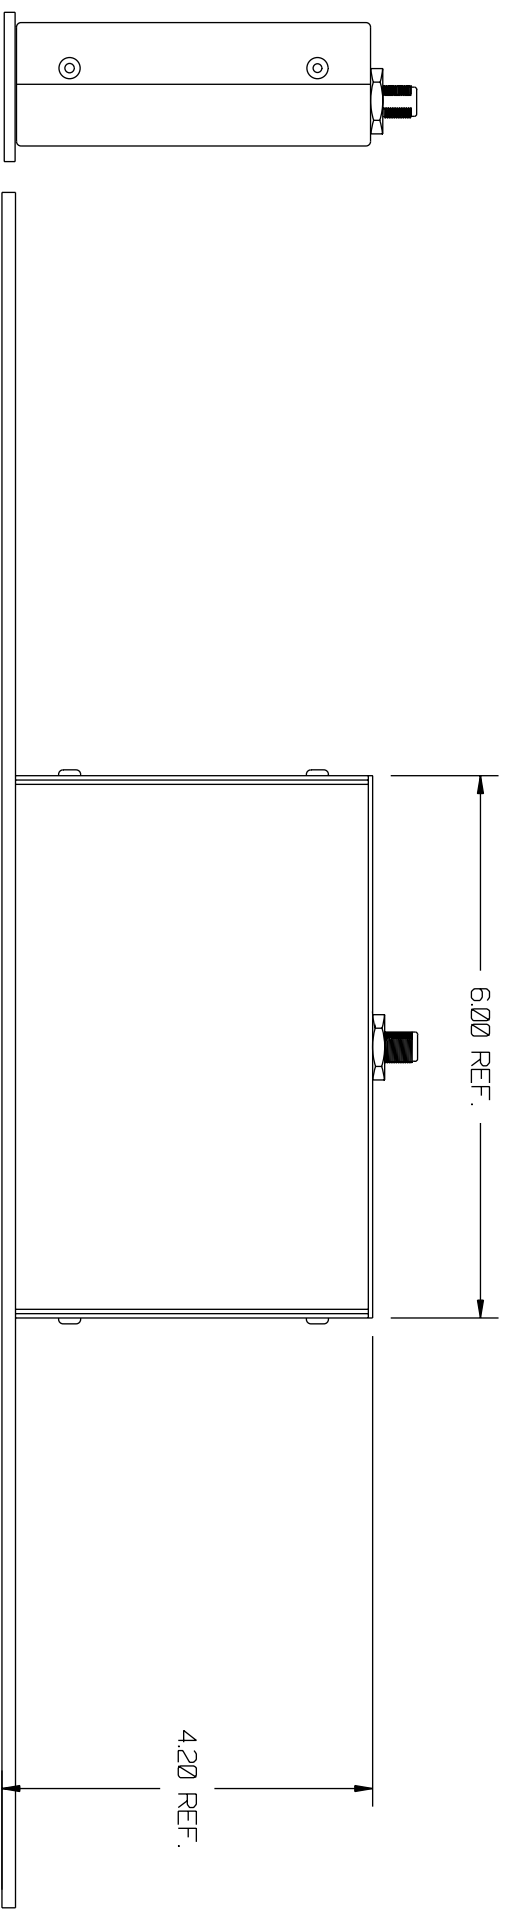

ELECTRICAL:

INSERTION LOSS:

- < 13 dB, 5 MHz TO 40 MHz
- < 14 dB, 40 MHz TO 260 MHz
- < 17 dB, 260 MHz TO 550 MHz
- < 19 dB, 550 MHz TO 860 MHz

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: 1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE. AND 2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.

FLATNESS: +/- .15 DB MAXIMUM, ALL PORTS

US PATENTS 5,495,212 AND 5,633,614 AND 6,150,896

VIDEO PINOUT: RJ-45 PIN 7 AND PIN 8

APPLICATION:

Rackmount RF video distribution hub for use in CATV/MATV systems with distances of up to 100 meters on CAT5 or better grade cable. (Product testing in specific applications is recommended.)

For more information go to - <http://www.lynxbroadband.com/>



TITLE: Lynx[®] 8 PORT RACKMOUNT VIDEO HUB

PART NO: 040-0101 DATE: 4/03