


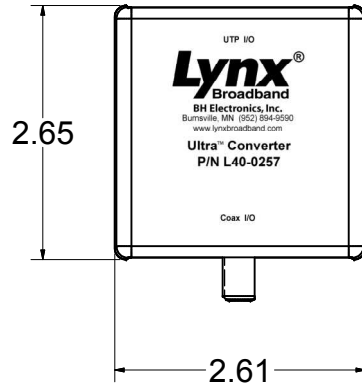


MECHANICAL

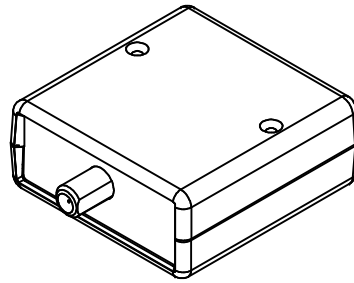

ELECTRICAL SPECIFICATIONS

Impedance: 75: 100 Ohms

Insertion Loss:

- 2.0 dB MAX @ 5MHz
- 1.75 dB MAX @ 50MHz
- 1.75 dB MAX @ 250MHz
- 2.5 dB MAX @ 450MHz

Return Loss:

- 10 dB MIN @ 5MHz
- 15.0 dB MIN @ 50MHz
- 15.0 dB MIN @ 550MHz
- 12.5 dB MIN @ 750MHz
- 12.5 dB MIN @ 860MHz


Balance:

- 55.0 dB MIN @ 5MHz
- 45.0 dB MIN @ 50MHz
- 40.0 dB MIN @ 100MHz
- 32.5 dB MIN @ 300MHz
- 27.5 dB MIN @ 550MHz
- 25.0 dB MIN @ 860MHz

DC Resistance: 47 Ohms +/- 10% - RJ Pin 1, 2, 3, 4, 5, 6 to GND (shield)

Operation Frequency: 5 MHz TO 860 MHz

RoHS COMPLIANT

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN  © 1998 BH Electronics
				BH CATALOG	
			<input type="checkbox"/> CUSTOM	NON-PROPRIETARY <input checked="" type="checkbox"/>	
				DRAWN: KALANI SA	
				ENGR: BRAD GASS	TITLE: PSPC
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	PART NO. L40-0257
A	9/25/2015	CUSTOMER PRINT		PAGE 1 OF 1	
ISSUE	DATE	REVISION	BY		